


E-Streamer MK2



Features

- Web configurable
- Firmware updateable
- SD Card based recording
- Multiple Universes per show
- Ability to add more universes (up to 64)
- Capability to store a large number of shows
- Supports Art-Net & ESP protocols
- DMX Recording and playback over Ethernet
- 4 DMX in and out ports (Model 70711)
- Simultaneous show recording and playback
- Multiple show playback is merged
- Flexible playlist allows event scheduling by minute, hour, day, and month increments
- Easy configuration using web interface
- Web-based master fader control of shows permitted during playback
- Quick shows access using front menu
- 19 inch 1U Rack mountable
- Shows may be controlled remotely through Ethernet commands or RS232 Serial Port (allows connection to many kinds of show control and integration systems such as AMX, Crestron, Dynalite etc.)
- 10/100 Ethernet input/output port
- USB port for data backup

Physical Dimensions

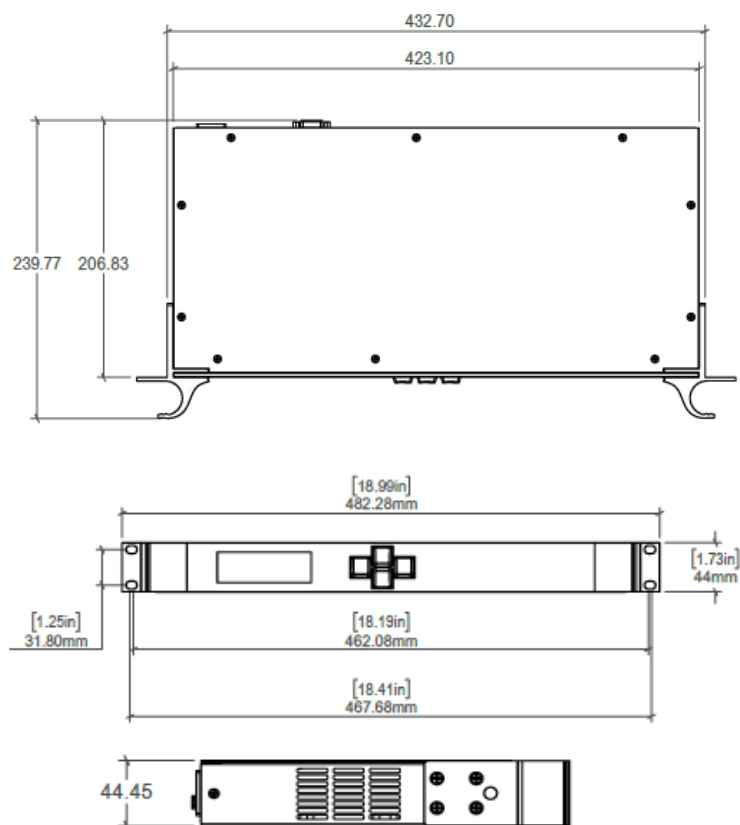

Safety

- This unit is intended for indoor use only.
- Do not expose this device to rain and moisture
- Do not use this device near water.
- Do not block any ventilation apertures on this device.
- Ensure proper earth connections
- Always be sure to mount this unit in an area that will allow proper ventilation. Allow about 6" (20 cm) between this device and a wall.
- Do not install this device near heat sources such as heaters, stoves, monitors, amplifiers, dimmers, luminaries or any other equipment that produces heat.
- Power-supply cords should be routed so that they are not likely to be walked on or pinched by protective cabinets, enclosures or cases.
- Use only attachments, accessories or fixings specified by ENTTEC.
- Unplug this device from the mains supply and external data links during electrical storms or when the device is not used for a long time.
- Do not remove the cover, there are no user serviceable components inside.

Ordering Information

| Part No. | Description |
|----------|------------------------------------------------------|
| 70710 | E-Streamer MK2 (inc. 8 universe license) |
| 70711 | E-Streamer MK2 + DMX Ports (inc. 4 universe license) |
| 70721 | 1 Universe license for E-Streamer MK2 |
| 70724 | 4 Universes license for E-Streamer MK2 |
| 70728 | 8 Universes license for E-Streamer MK2 |

Specifications

| Item | Product Name | |
|--------------------------------------|-----------------------------------------------------|--------------------|
| | 70710 | 70711 |
| Input Voltage | 85 - 264V AC | |
| Input Frequency | 47 - 63Hz | |
| Supported Protocols | Artnet 1/2/3 | Artnet 1/2/3 |
| | ESP | ESP |
| | UDP | UDP |
| | RS232 | RS232 |
| Output Protocols | | DMX512 |
| | Artnet 1/2/3 | Artnet 1/2/3 |
| Heat dissipation | 65BTU/ Hour | |
| Ambient Operating Temperature | 0 to 50 °C in non-condensing environment (5% - 95%) | |
| Connectors | 1 x RJ-45 Ethernet Connector | |
| | 1 x RS232 Connector | |
| IP Rating | 2 x USB Ports (Top one for backup) | |
| | | 4* 5pin female XLR |
| | | 4* 5pin male XLR |
| IP Rating | IP 20 | |
| Weight | Unit | 1.8 kg / 3.96 lb |
| | Shipped | 2.6 kg / 5.78 lb |
| Length | With rack ears | 483 mm/19.1 inches |
| | Without rack ears | 424 mm/16.7 inches |
| Width | With rack ears | 240 mm /9.5 inches |
| | Without rack ears | 207 mm /8.2 inches |
| Height | 32 mm/1.26 inches | |
| Certification | CE, FCC certified | |

Due to continuous improvements and innovations of all ENTTEC products, specifications and features are subject to change without notice.

enttec.com

MELBOURNE AUS / LONDON UK / RALEIGH-DURHAM USA