SPECIFY

SPECIFY YOUR PROJECT REQUIREMENTS BELOW

PLEASE COMPLETE ALL DETAILS BELOW				SOMETHING DIFFERENT?
PROJECT NAME: CLIENT: DOT QUANTITY: STRING QUANTITY: BODY COLOUR:	BLACK		FLAT CLEAR	IF YOU REQUIRE CUSTOM DETAILS NOT SPECIFIED WITHIN THESE CATEGORIES CONTACT ENTTEC. OUR IN-HOUSE ENGINEERING TEAM CAN EVALUATE YOUR REQUIREMENTS AND WILL ENDEAVOR TO DELIVER A PRODUCT SUITED TO YOUR PROJECT.
DIFFUSER TYPE: POWER CONSUMPTION (WATTS): COMMENTS:	DOME OPAL 15			ORDER PROCESS 1. SUBMIT YOUR REQUIREMENTS 2. RECEIVE A PROJECT CODE/S FROM ENTTEC 3. SUBMIT A PURCHASE ORDER SPECIFYING SUPPLIED PROJECT CODE/S *NOTES* *QUICK CONNECT IS NOT AVAILABLE IN THE HIGH CURRENT VERSION

THE APPEARANCE OF YOUR DOTS WILL DIFFER DEPENDING ON YOUR CUSTOMISATION



FEATURES

INGRESS PROTECTION	IP66		
POWER INPUT	24-60VDC		
DATA INPUT	SPXL 8/16 BIT		
LED TYPE	RGBW		
OPERATIONAL TEMP	-15°C TO +50°C*		
*HEAT SENSOR AUTOMATICALLY DIMS LIGHT WHEN OPERATING TEMPERATURE IS EXCEEDED.			
BODY MATERIAL	5083 ALUMINIUM		
MATERIAL TREATMENT	POWDERCOATED		
DIFFUSER MATERIAL	РММА		
WEIGHT			
WARRANTY	3 YEARS		

PAGE 1 OF 5 M-FILES ID: 4838298 ASIA-PACIFIC / MELBOURNE, AUSTRALIA AMERICAS / RALEIGH-DURHAM, USA EUROPE / LONDON, UK WRITTEN CONSENT MUST BE OBTAINED TO USE CONTENT CONTAINED WITHIN



SMRTPXL 135

PIXEL DOT RGBW IP66 135

SPECIFICATION SHEET


SMRTPXL 135

PIXEL DOT RGBW IP66 135


WIRING


WIRING OF DOTS

LED DOTS WILL NOT BE SUPPLIED CONNECTED, THE CONNECTION MUST BE MADE BY THE INSTALLER. RECOMMENDED WIRE GAUGE: DATA CABLE (24AWG), POWER (18AWG)

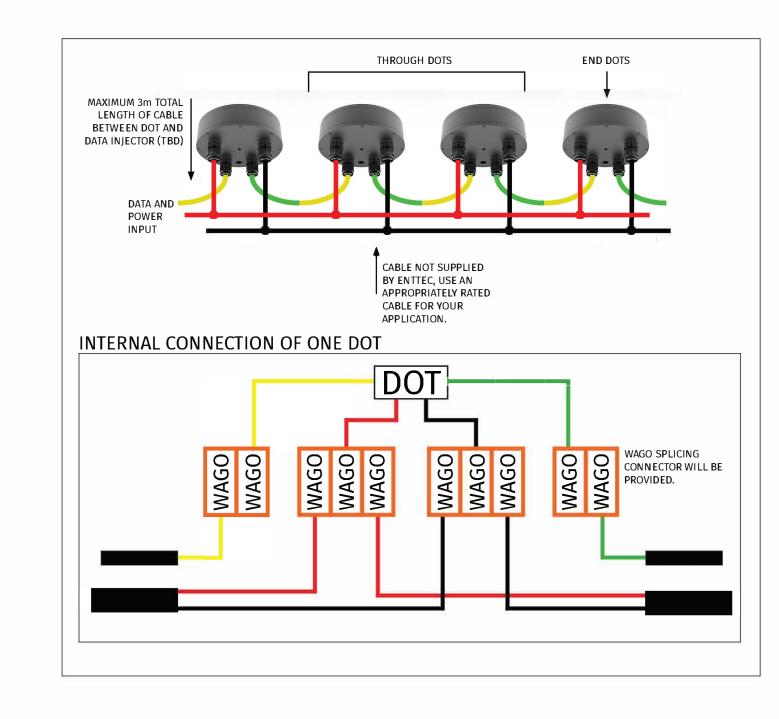



DIMENSIONS PRODUCT DIMENSIONS (ALL IN MM UNLESS OTHERWISE SPECIFIED) 105 [4.13in]





65.6 [2.58in]





DIFFUSER TYPE


SELECT ONE OF THE FOLLOWING OPTIONS








FLAT CLEAR





PAGE 2 OF 5 M-FILES ID: 4838298

CHANGES CAN BE MADE TO THIS PRODUCT WITHOUT ANY NOTICE. CURRENT DOCUMENTATION IS AVAILABLE ON THE AMERICAS / RALEIGH-DURHAM, USA ENTTEC WEBSITE.

OBTAINED TO USE CONTENT EUROPE / LONDON, UK CONTAINED WITHIN

ASIA-PACIFIC / MELBOURNE, AUSTRALIA

WRITTEN CONSENT MUST BE ENTTEC WWW.ENTTEC.COM

PAGE 3 OF 5 M-FILES ID: 4838298

CHANGES CAN BE MADE TO THIS PRODUCT WITHOUT ANY NOTICE. CURRENT DOCUMENTATION IS AVAILABLE ON THE AMERICAS / RALEIGH-DURHAM, USA ENTTEC WEBSITE.

EUROPE / LONDON, UK



SEE BELOW FOR SOME OF THE BEST OPTIONS.

DATA

SYSTEM

PIXELATOR

PIXELATOR MINI

PIXELATOR MINI (PX1-8D)

PIXEL OCTO (PC1-2D)

COMPATIBLE PRODUCTS

SPECIFICATION SHEET

SKU

73544


73923


75009-24

MOUNTING ACCESSORIES

THIS IS SOLD SEPARATELY, SEARCH THE PART NUMBER FOR FURTHER INFORMATION

MOUNTING BRACKETS

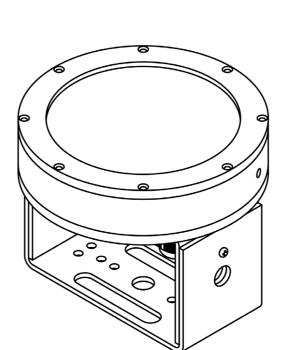

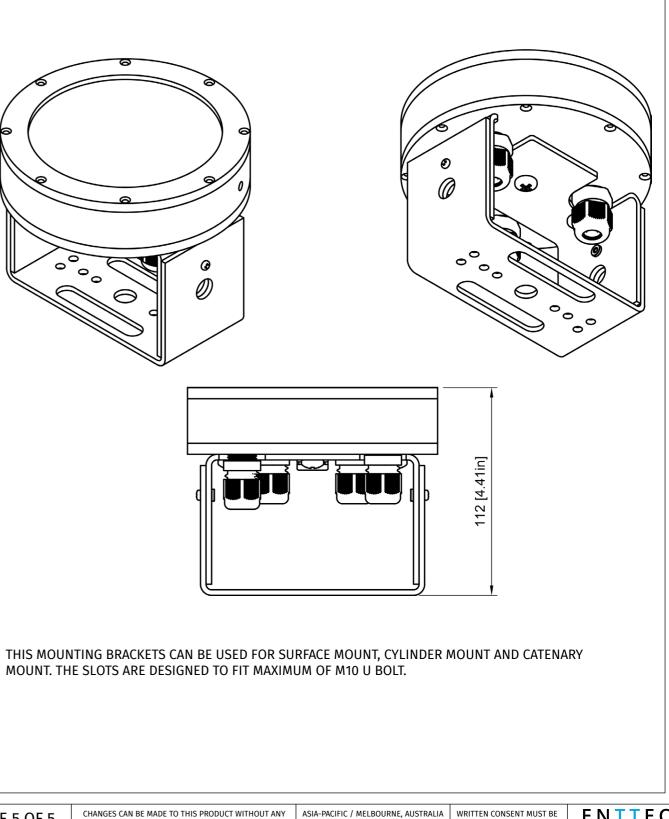

MOUNT. THE SLOTS ARE DESIGNED TO FIT MAXIMUM OF M10 U BOLT.

PAGE 4 OF 5 M-FILES ID: 4838298



SKU

70060

70066

71066

71520

SYSTEM EXAMPLE



THE SMRTPXL 135 PIXEL DOT REQUIRES DC POWER AND DATA INPUT. WE RECOMMEND THE USE OF THE ENTTEC PIXELATOR AND PLINK PRODUCTS.

DATA AND POWER

PIXEL TRITON 24V

PIXEL PORT 24V

SMRT PXL 135

PLINK INJECTOR

PSAT 24V

INJECTOR

PLINK INJECTOR (5-60V IP66)

PLINK INJECTOR (12-24V)

SKU

75020-24

76303-24

AMERICAS / RALEIGH-DURHAM, USA EUROPE / LONDON, UK